



EXPERIMENT: HEAT CONDUCTION

Nomenclature

Name	Symbol SI unit
Radius of Disk	R [m]
Heat transfer area	A [m ²]
Wall thickness (distance)	L [m]
Constant Value (k/A)	C
Electrical power to heating element	Q [W]
Heat transfer rate per unit time (heat flow)	Q [W]
Temperature measured	T _a (eg. T ₁) [°C]
Temperature at hot interface	T _{hotface} [°C]
Temperature at cold interface	T _{coldface} [°C]
Temperature gradient	Grad (eg. Grad _{hot}) [W/m°C]
Thermal conductivity	k [W/m°C]
Time	t [secs] α



1. OBJECT

The purpose of this experiment is to determine the constant of proportionality (the thermal conductivity k) for one-dimensional steady flow of heat.

2. INTRODUCTION

Thermal conduction is the transfer of heat energy in a material due to the temperature gradient within it. It always takes place from a region of higher temperature to a region of lower temperature. A solid is chosen for the experiment of pure conduction because both liquids and gasses exhibit excessive convective heat transfer. For practical situation, heat conduction occurs in three dimensions, a complexity which often requires extensive computation to analyze. For experiment, a single dimensional approach is required to demonstrate the basic law that relates rate of heat flow to temperature gradient and area.

3. THEORY

3.1. LINEAR HEAT CONDUCTION

According to Fourier's law of heat conduction: If a plane wall of thickness (ΔL) and area (A) supports a temperature difference (ΔT) then the heat transfer rate per unit time (Q) by conduction through the wall is found to be:

$$Q = \alpha A \frac{\Delta T}{\Delta L} \text{ where } \Delta L = (L_b - L_a)$$

If the material of the wall is homogeneous and has a thermal conductivity k (the constant of proportionality) then:

$$Q = -kA \frac{\Delta T}{\Delta L} \text{ where } \Delta T = (T_a - T_b)$$

It should be noted that heat flow is positive in the direction of temperature fall hence the negative sign in the equation. For convenience the equation can be rearranged to avoid the negative sign as follows:

$$Q = kA \frac{\Delta T}{\Delta L} \text{ where } \Delta T = (T_b - T_a)$$

Note: In this exercise k and A are constant.

Linear heat conduction experiment setup can be seen in Fig.1.

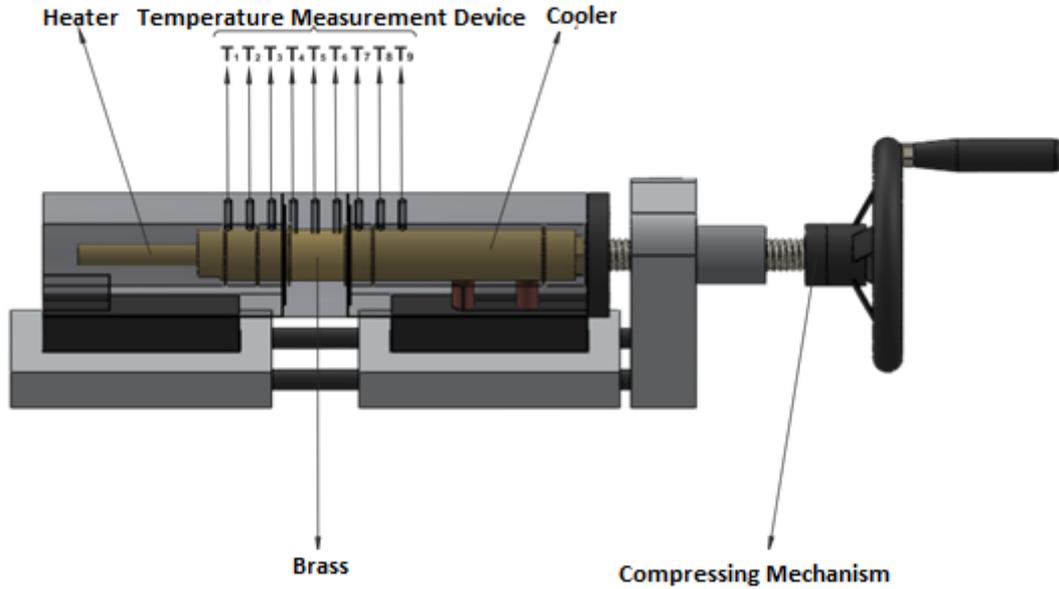


Fig.1 Linear Heat Conduction Experiment Setup

3.2. RADIAL HEAT CONDUCTION

When the inner and outer surfaces of a thick walled cylinder are each at a different uniform temperature, heat flows radially through the cylinder wall. The disk can be considered to be constructed as a series of successive layers. From continuity considerations the radial heat flow through each of the successive layers in the wall must be constant if the flow is steady but since the area of the successive layers increases with radius, the temperature gradient must decrease with radius.

$$k = \frac{W \ln \frac{R_b}{R_a}}{2\pi L(T_b - T_a)}$$

Radial heat conduction experiment setup can be seen in Fig.2.

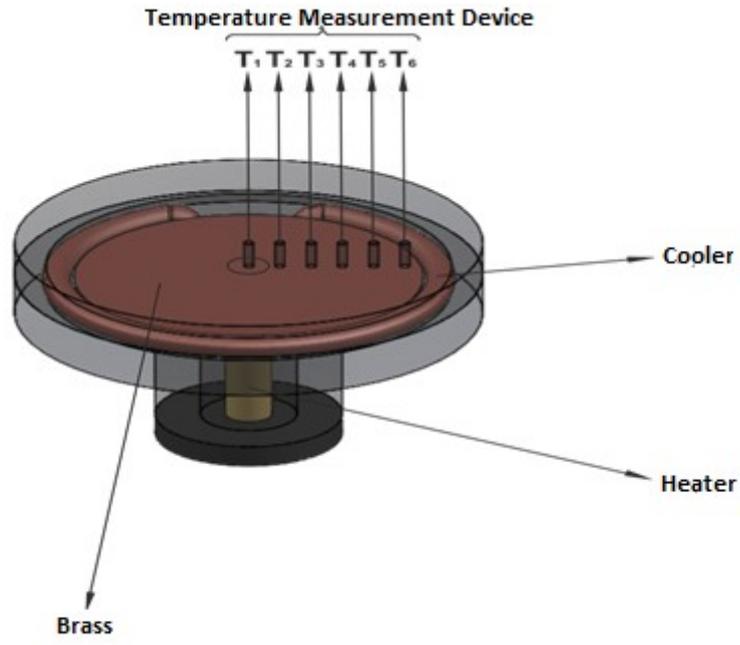


Fig.2. Radial Heat Conduction Experiment Setup



4. EXPERIMENTS TO BE PERFORMED

The test unit will be introduced in the laboratory before the experiment by the relevant assistant.

4.1 Linear Heat Conduction

Aim of the Experiment: To comprehend how to calculate thermal conductivity(k)

The necessary data for calculations will be recorded to the table given below.

Material:									
Power (W)	T ₁	T ₂	T ₃	T ₄	T ₅	T ₆	T ₇	T ₈	T ₉
Distance from T ₁ (m)	0	0,01	0,02	0,03	0,04	0,05	0,06	0,07	0,08

Calculations: Using the equation given below, calculate the thermal conductivity.


Thermal conductivity is defined as:

$$k = \frac{Q\Delta L}{A\Delta T}$$


Where:

$$A = 7,065 \times 10^{-4} m^2$$

Plot a graph of temperature against position along the bar and draw the best straight line through the points. Comment on the graph.

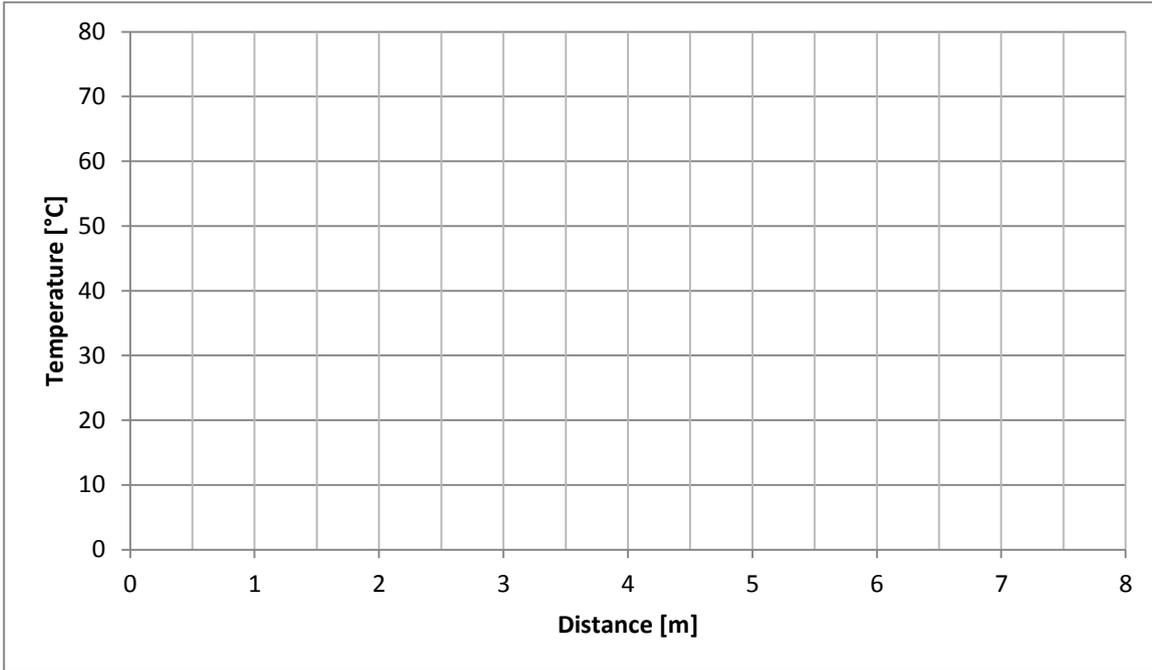

A sample graph of temperature against position along the bar can be seen.

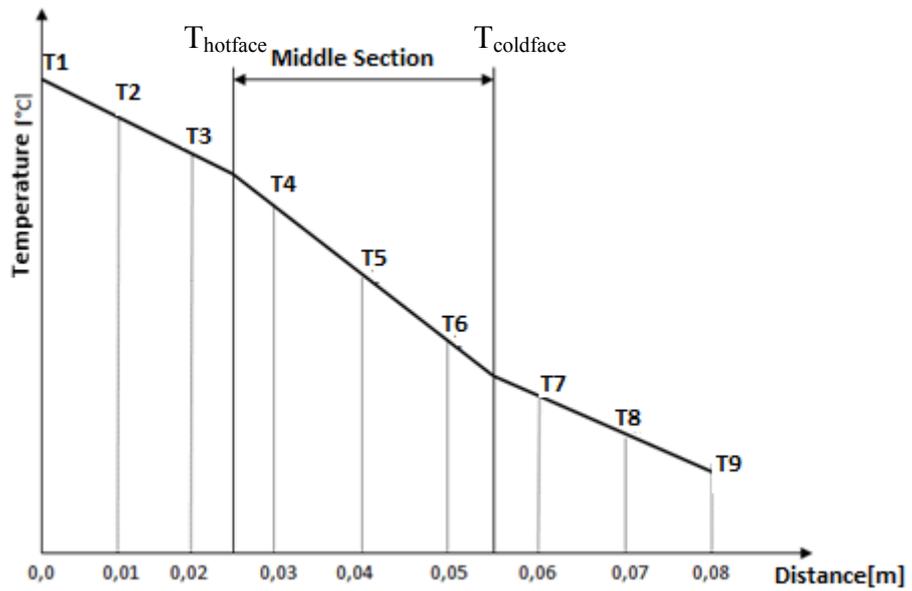

Compare your result with Table 1.



Table 1. Thermal Conductivities for Different Material Types

Materials in Normal Conditions (298 K, 24.85 °C)		Thermal Conductivity (k) W/m°C
Metals	Pure Aluminium	205-237
	Aluminium Alloy (6082)	170
	Brass (CZ 121)	123
	Brass (63% Copper)	125
	Brass (70% Copper)	109-121
	Pure Copper	353-386
	Copper (C101)	388
	Light Steel	50
	Stainless Steel	16
Gas	Air	0.0234
	Hydrogen	0.172
Others	Asbestos	0.28
	Glass	0.8
	Water	0.6
	Wood	0.07-0.2



4.2 Linear Heat Conduction for Different Materials

Aim of the Experiment: To comprehend how to calculate thermal conductivity (k) for different materials.

The necessary data for calculations will be recorded to the table given below.

Material:									
Power (W)	T ₁	T ₂	T ₃	T ₄	T ₅	T ₆	T ₇	T ₈	T ₉
Distance from T ₁ (m)	0	0,01	0,02	0,03	0,04	0,05	0,06	0,07	0,08

Calculations: Using the equation given below, calculate the thermal conductivity.


Thermal conductivity is defined as:

$$k = \frac{Q\Delta L}{A\Delta T}$$

Where:

$$A = 7,065 \times 10^{-4} m^2$$

Plot a graph of temperature against position along the bar and draw the best straight line through the points. Comment on the graph.

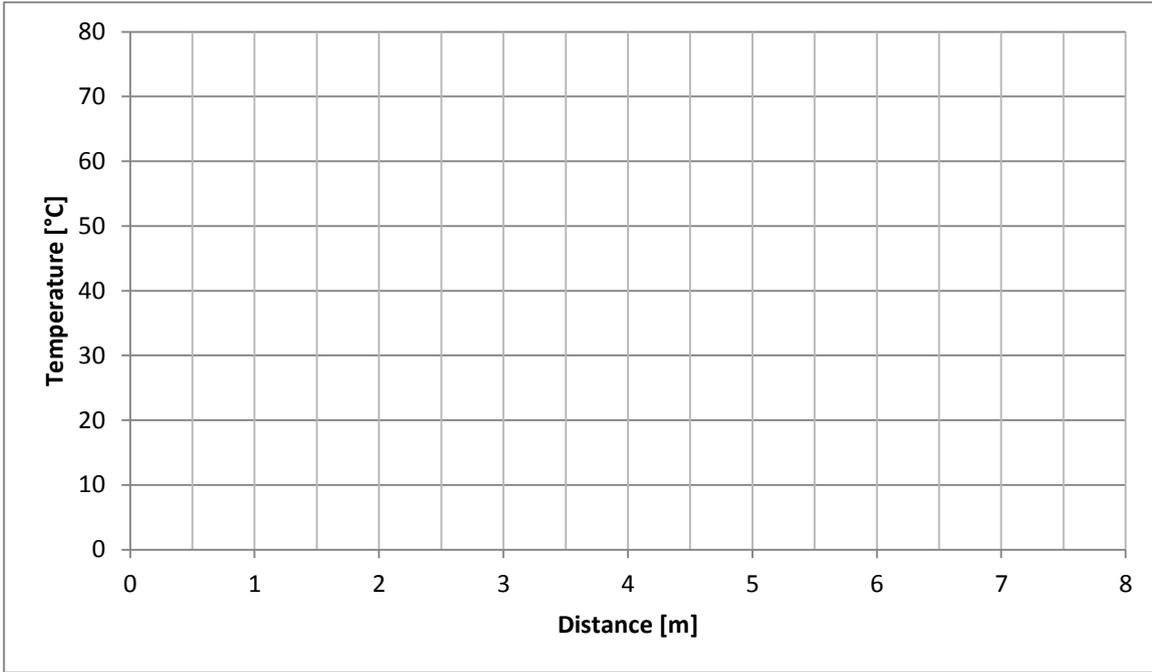

Compare your result with Table 1.



4.3 Radial Heat Conduction

Aim of the Experiment: To comprehend how to calculate thermal conductivity (k)

The necessary data for calculations will be recorded to the table given below.

Material:						
Power (W)	T ₁	T ₂	T ₃	T ₄	T ₅	T ₆
Radial Distance from T ₁ (m)	0,00	0,01	0,02	0,03	0,04	0,05

Calculations: Using the equation given below, calculate the thermal conductivity.


Thermal conductivity is defined as:

$$k = \frac{W \ln \frac{R_b}{R_a}}{2\pi L(T_b - T_a)}$$

Where:

$$L=0,012 \text{ m}$$

Plot a graph of temperature against position along the bar and draw the best straight line through the points. Comment on the graph.

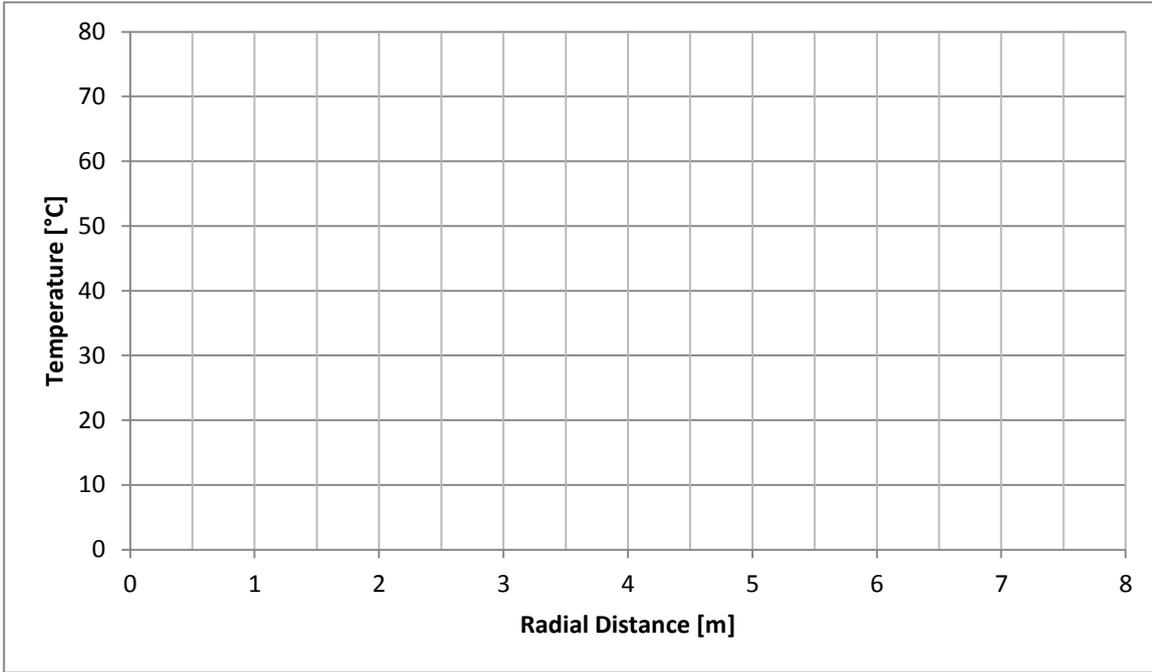



5. REPORT

In your laboratory reports must have the followings;

- a) Cover
- b) A short introduction
- c) All the necessary calculations using measured data.
- d) Discussion of your results and a conclusion.